



Elevator Air Conditioning System

ECOLUX


Compact Type TLP Series

General Information

ECOLUX elevator air conditioning system is the most advanced technology and is suitable for every lift model.

TLP Compact Type Series combine both the air-cooling and the water evaporation functions into a single mechanical body that requires less spatial area. This is a break-through in the elevator air conditioning technology.

Since it requires simple installation and disassembling procedures, it takes less time in maintenance service. There are 2.5kw and 3.2kw cooling capacities models designed for different circumstances.

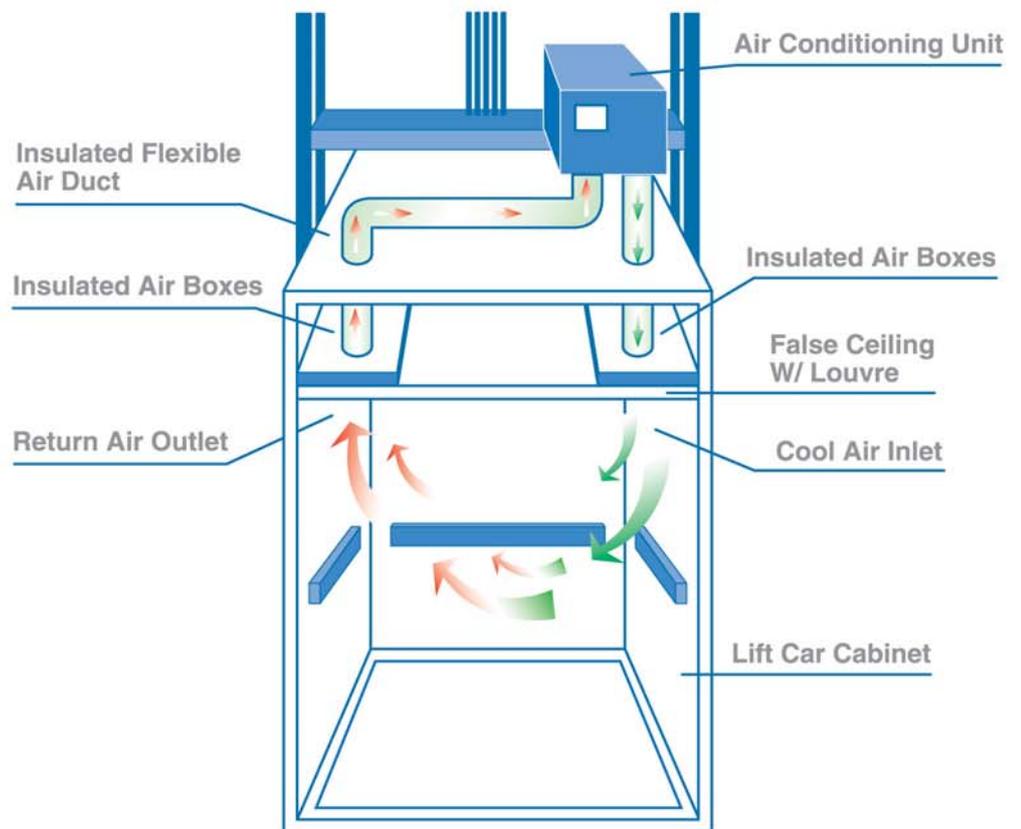

Features



■ No Water Drips

The system adopts an internal evaporating system which vaporizes the condensation water. Therefore, additional system and cost for discharging condensation water are not required.

■ Easily Install and Dissembling

There is no external copper tube and drain pipe. The air-conditioning system is easily installed and repaired.

■ Energy Saving

It has high efficiency of air-cooling includes various protection devices and the operation is simple and safe.

■ Low Noise Operation


Equipped with the high quality Japanese rotary type compressor with low noise blower fans, the system always kept at a low noise level.

■ Bacterial Protection

By using anti-bacterial filters, it provides fresher air and clears the bad smell.

■ Special Models

More choices of environmental friendly refrigerant, 110V and 60Hz models.



Elevator Air Conditioning System

ECOLUX

Compact Type TLP Series



Specifications

Model		TLP-25/TLP-25E*	TLP-32/TLP-32E*	TLP-25-H	TLP-32-H
Series		COMPACT TYPE, NO WATER DRIPS DESIGN			
Cooling Capacity#	kw	2.5	3.2	2.5	3.2
	Btu/h	9,000	12,000	9,000	12,000
Heating Capacity	kw	/	/	2,200	2,200
Air Flow Rate	CMH	430	530	430	530
Power Input	kw	1.0	1.2	1.0	1.2
Running Current	A	4.8	5.8	4.8	5.8
Power Supply		1P-220V-50Hz / 1P-110V-60Hz*			
Noise Level	db(A)	< 48	< 50	< 48	< 50
Refrigerant		R-22 / R-407C*			
Dimensions	mm	W460 x D620 x H440	W580 x D640 x H520	W460 x D620 x H440	W580 x D640 x H520
Weight	kg	50	59	50	59
Safety Devices		Thermal Protector, Fuse, Timer Delay Protector, Water Sensor			
Control		Wireless Remote Control, Timer Control			
Options		Anti-bacterial Filter, Tailor Made Air Box, Special Function Control Box, Booster Fan			

*Indoor 27°C DB, 19°C WB, Outdoor 35°C DB, 24°C WB

* Options

Specification subject to change without notice

Website: <http://www.apex-eng.com>
<http://www.elevatorairconditioner.com>

E-mail: enquiry@apex-eng.com

Enquiry: 852 - 9094 1357 (Hong Kong)

ECOLUX